

# FEIGHNER ROLLING DOCK

## ASSEMBLY INSTRUCTIONS

Please Note:

Pipe assemblies are required every 16".

For extra stability we recommend pipe assemblies every 8'.

There is an example sketch on the following page.

# TF The Feighner Company, Inc.

C 2264 LANSING RD, CHARLOTTE, MI 48813


[WWW.1800BOATLIFT.COM](http://WWW.1800BOATLIFT.COM)

[WWW.HYDROMAXII.COM](http://WWW.HYDROMAXII.COM)


TOLL FREE: (800) BOAT-LIFT

PHONE: (517) 541-0900


FAX: (517) 541-0909

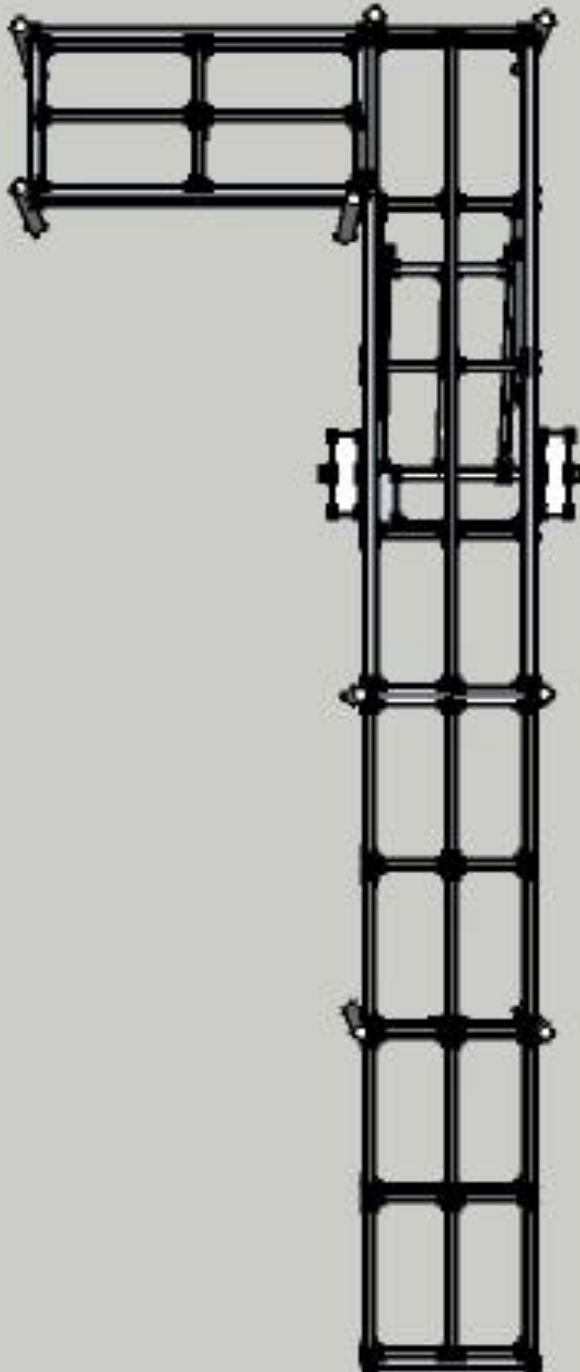

Bolt (2) slide rollers to H Brace assembly using (2) 1/2" x 5" bolts, (6) 1/2" flat washers and (2) 1/2" nuts.

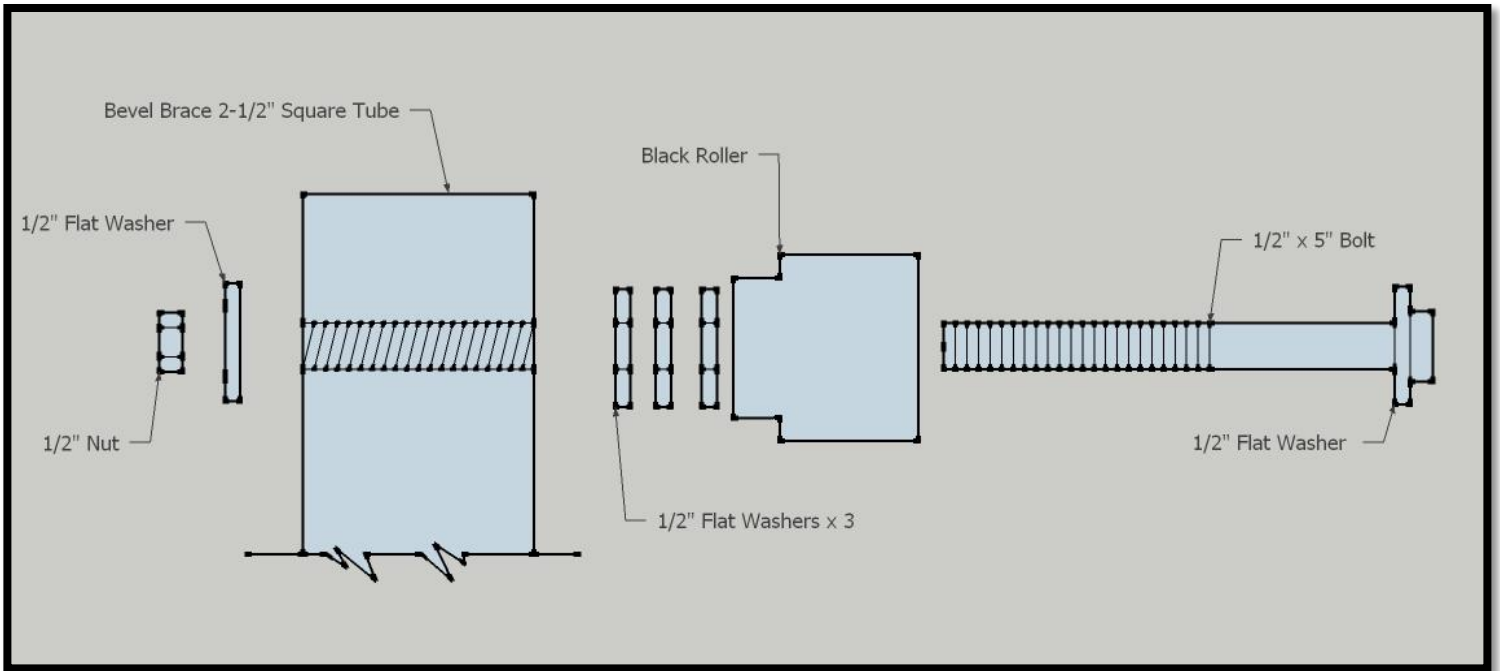



Bolt (2) plastic pulleys to H Brace assembly using (2) 3/8" x 3" Bolts, (4) 3/8" flat washers and (2) 3/8" nuts.

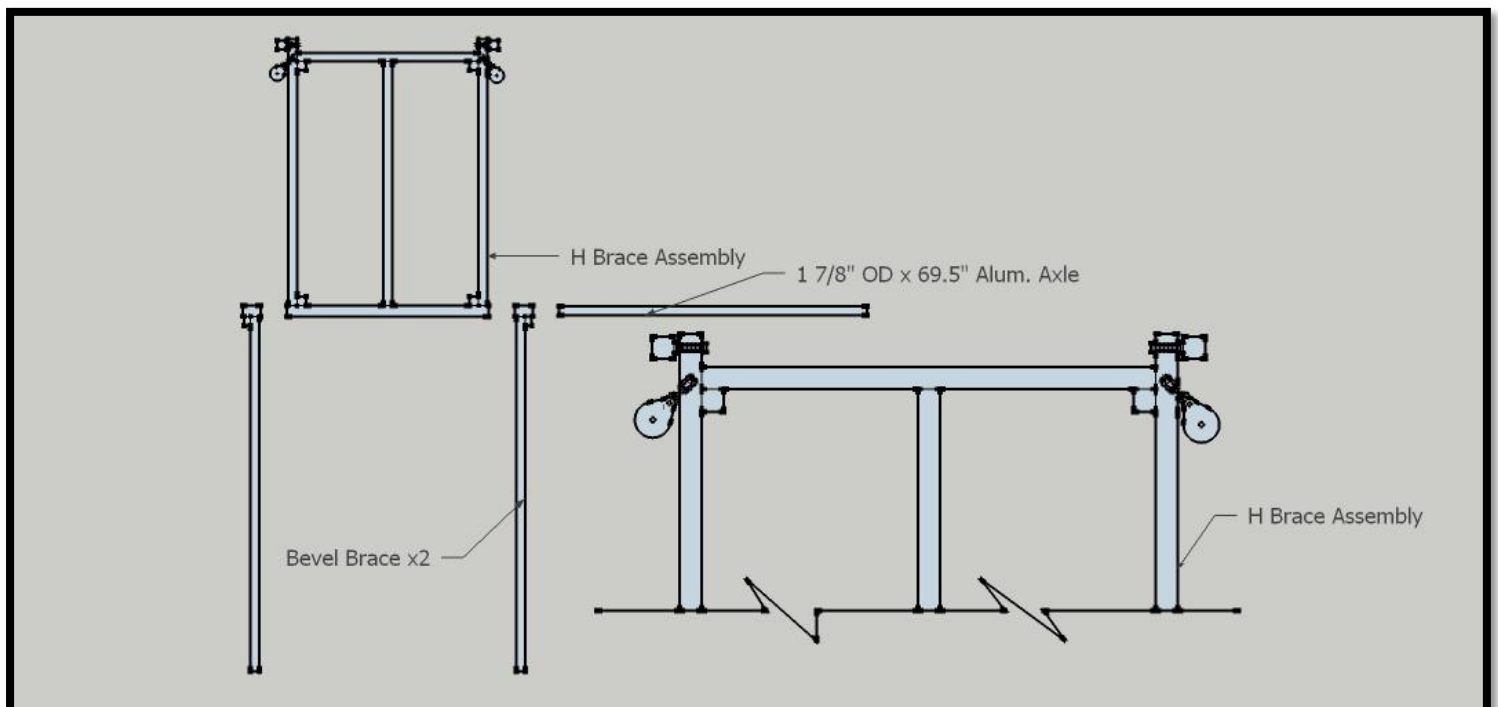


# TF The Feighner Company, Inc.

2264 LANSING RD, CHARLOTTE, MI 48813  
 WWW.1800BOATLIFT.COM  
 WWW.HYDROMAXII.COM

TOLL FREE: (800) BOAT-LIFT  
 PHONE: (517) 541-0900  
 FAX: (517) 541-0909

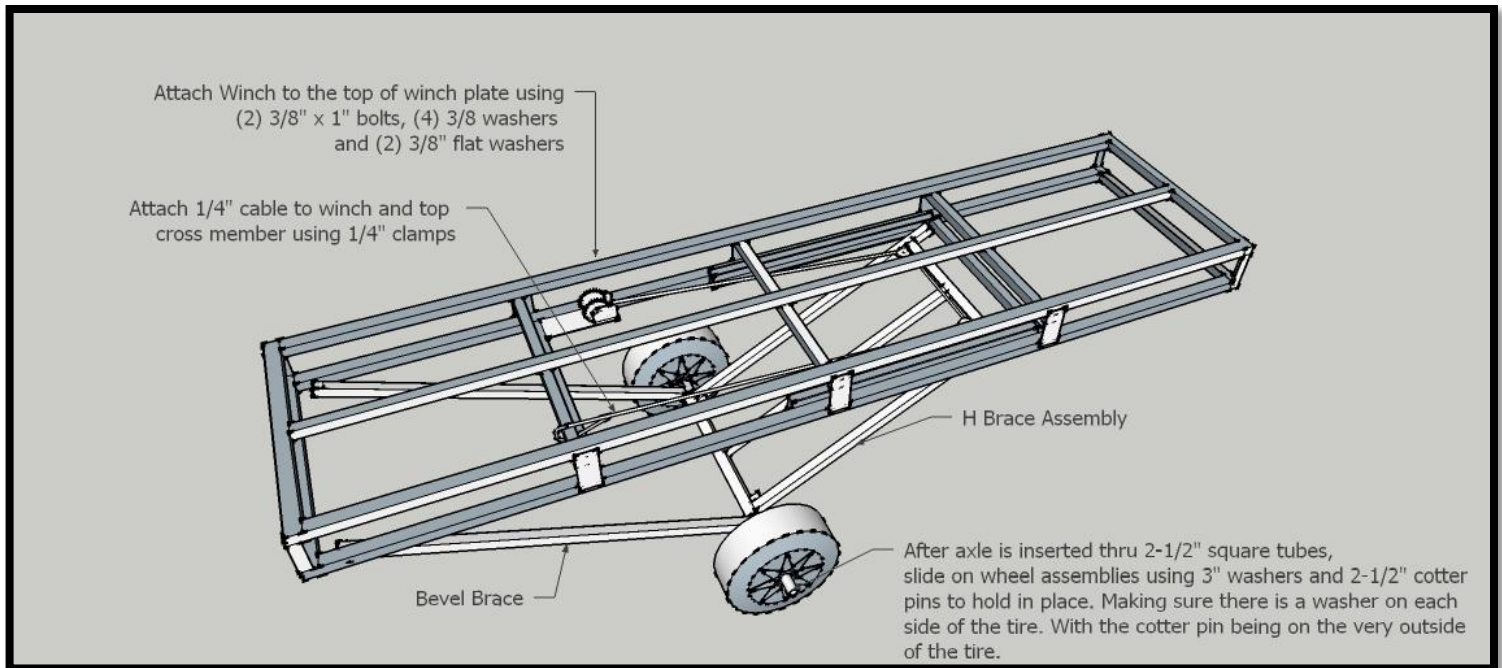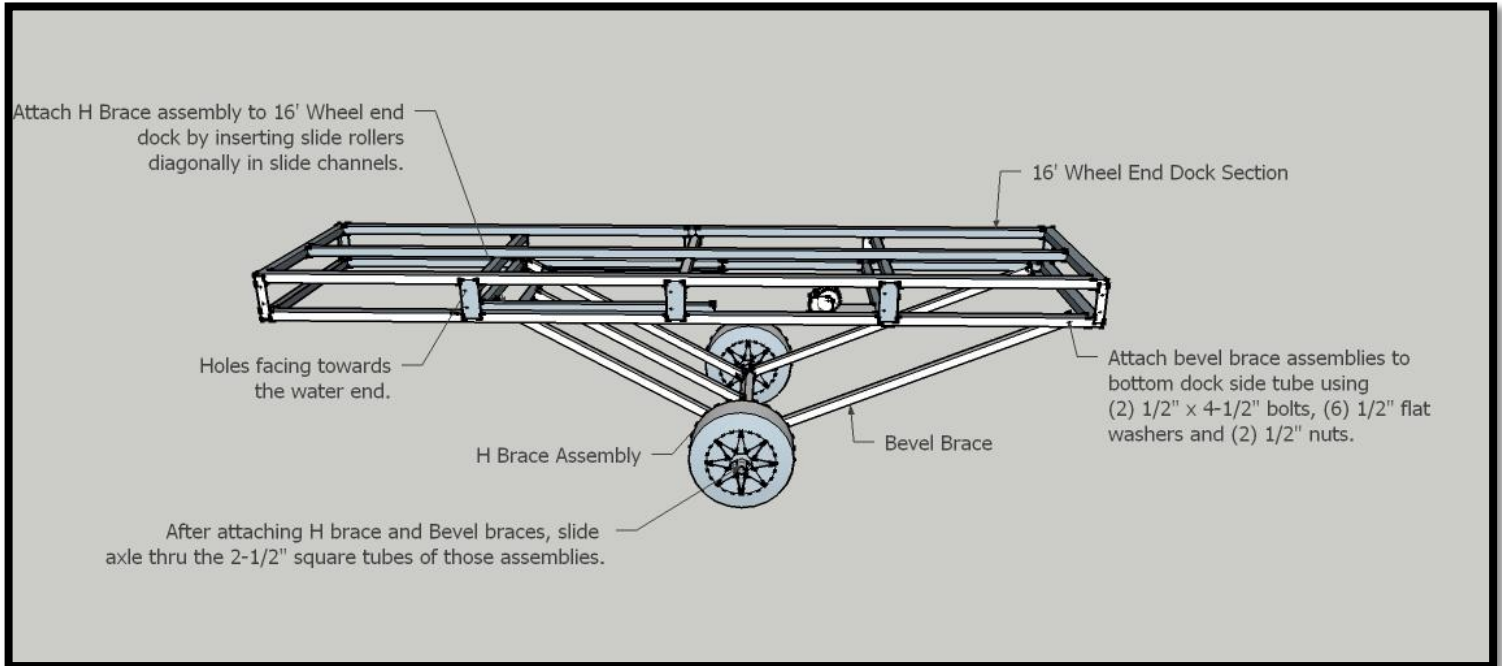

## Example of a Pipe assembly

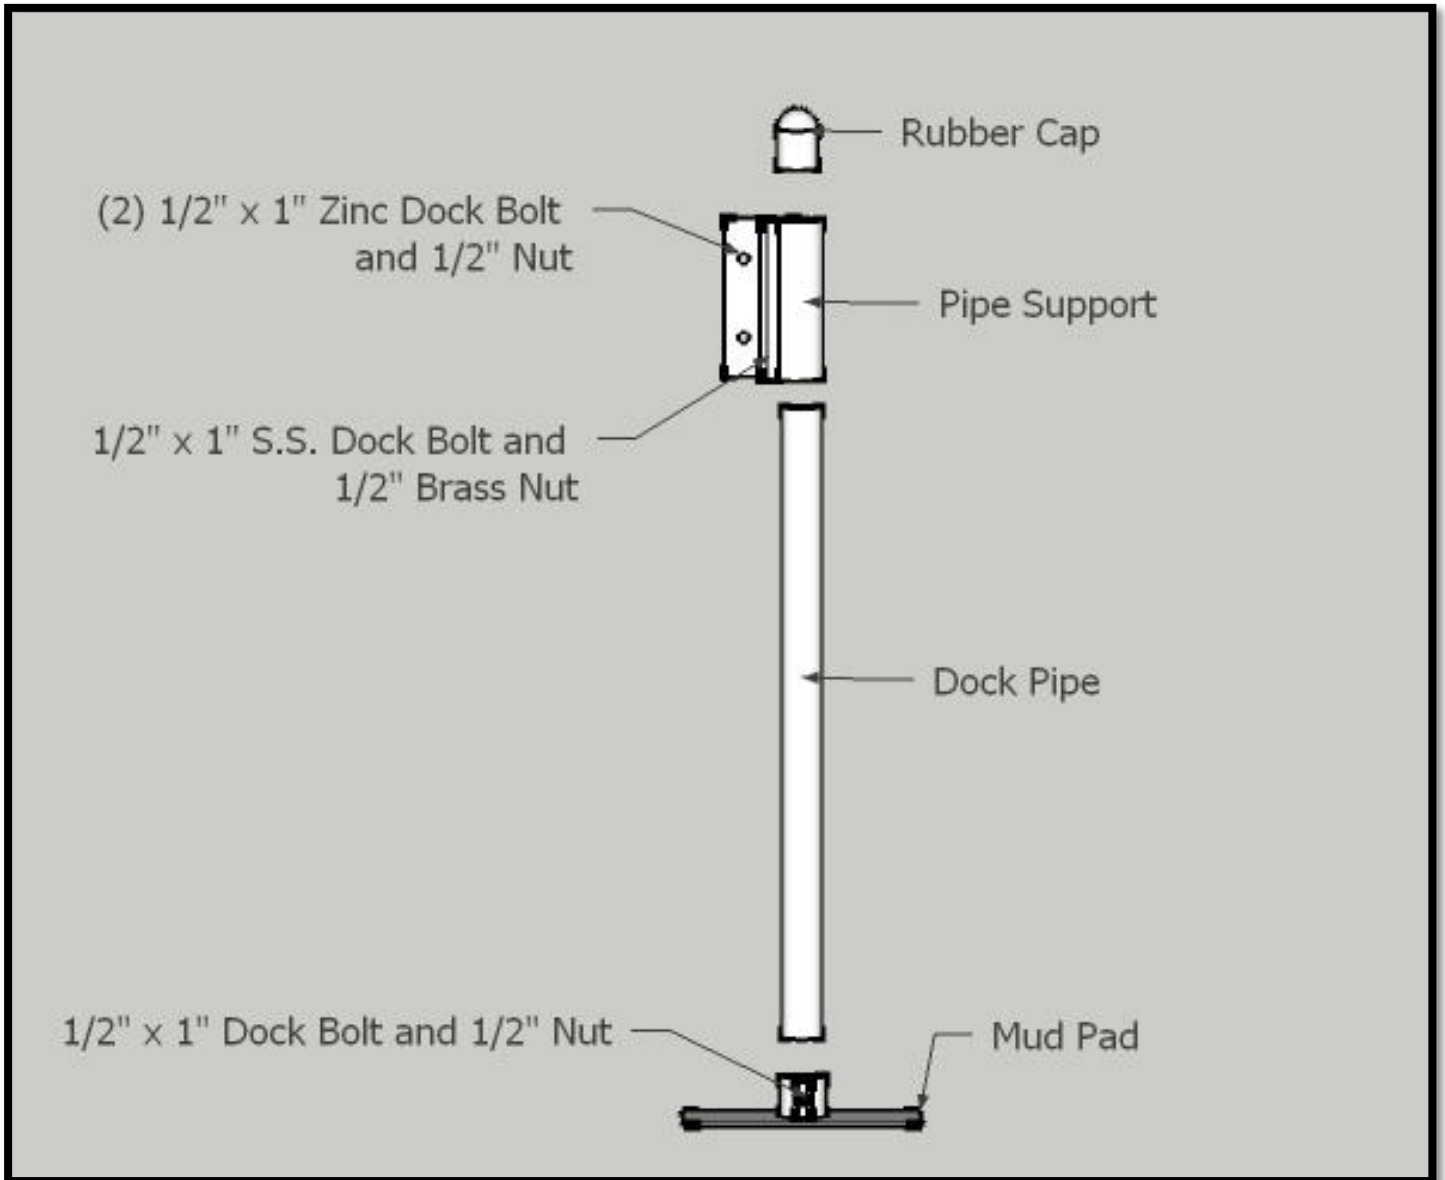

## Assembling the winch

**Before you install the cable to the winch, string the pulleys on to the winch cable first. The 2 – 4 link pulleys first and then the 2 link pulley. Then continue with the assembly of the winch.**

Take the winch bag kit. Take out the “M” Clip with the bolt and nut. Thread the taped end of the cable through the bigger of the two holes. Going from inside the drum to outside. Pull plenty of slack out.

Adding the “M” clip.

On the smaller hole, insert the bolt from within the drum with the bottom side of the bolt through first. So the head of the bolt is on the inside of the drum.

Now add the “M” clip to the bolt with the nut. You will only be able to put the nut on about 3 or 4 threads for now.

See pictures on what direction to thread the cable under the “M” clip.

